

OFF-GRID 150

LITHIUM IRON PHOSPHATE BATTERY | 150Ah Capacity | 150A Discharge | Built-In Heater | Bluetooth


LITHIUM IRON PHOSPHATE BATTERY

ELECTRICAL SPECIFICATIONS	
Nominal Voltage	12.8 V
Nominal Capacity	150 Ah
Capacity @ 0.2C	>290 min
Energy	1920 Wh
Resistance	<30 mΩ
Efficiency	99%
Self Discharge	<3% per Month
Maximum Modules in Series / Parallel	1 / Unlimited

DISCHARGE SPECIFICATIONS	
Maximum Continuous Discharge Current	150 A
Peak Discharge Current	320 A
Recommended Low Voltage Disconnect	11 V
PCM Discharge Voltage Cut-Off	10 V
Reconnect Voltage	12 V
Short Circuit Protection	Yes

TEMPERATURE SPECIFICATIONS	
Discharge Temperature	-4 to 140 °F (-20 to 60 °C)
Charge Temperature	 -4 to 140 °F (-20 to 60 °C)
Storage Temperature	-4 to 140 °F (-20 to 60 °C)
PCM High Temperature Cut-Off	176 °F (80 °C)

DIMENSIONAL SPECIFICATIONS

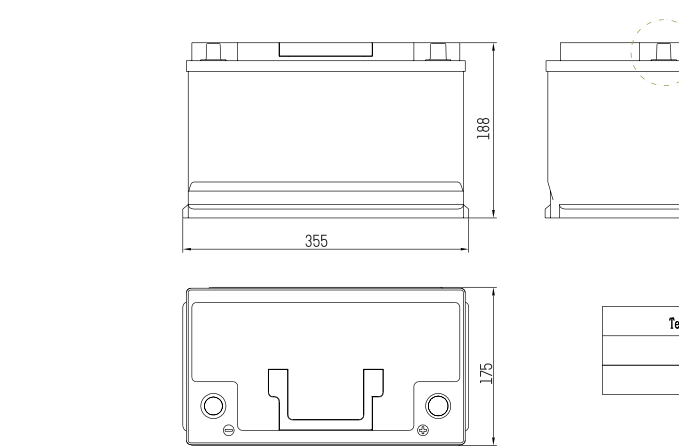

MECHANICAL SPECIFICATIONS	
Dimensions (L x W x H)	355 x 175 x 188 mm
Weight	16.0kg
Terminal Type	SAE & M8
Case Material	ABS
Enclosure Protection	IP65
Chemistry	LiFePO ₄

CHARGE SPECIFICATIONS	
Recommended Charge Current	30 A - 90 A
Maximum Charge Current	100 A
Recommended Charge Voltage	14.2 V - 14.6 V
PCM Charge Voltage Cut-Off	15.6 V
Reconnect Voltage	15.2 V
Balancing Voltage	14.4 V
Active Balance Current:	1~3 A

Terminal	Diameter/mm	
	positive	negative
D	19.5	17.9


OFF-GRID 150

LITHIUM IRON PHOSPHATE BATTERY | 150Ah Capacity | 150A Discharge | Built-In Heater




PERFORMANCE CHARACTERISTICS


Different Rate Discharge Curve @25°C

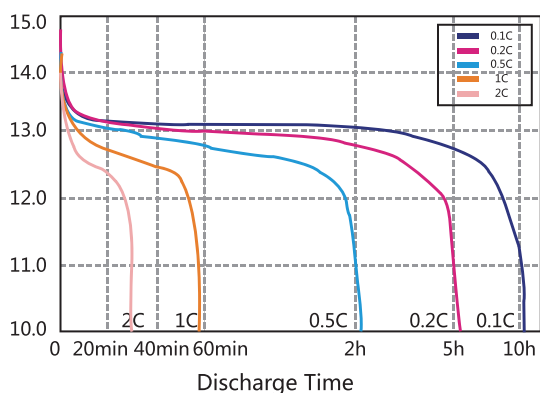


Different Temperature Discharge Curve @0.5C

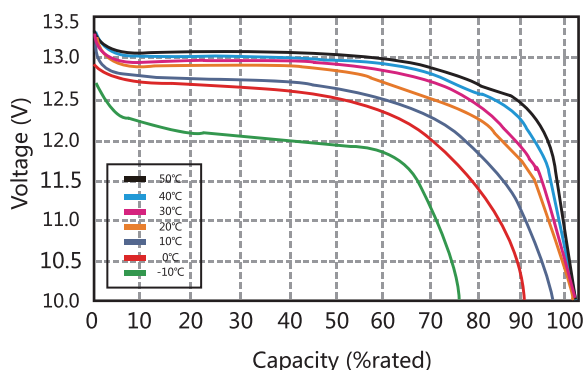


Charging Characteristics @0.5C 25°C

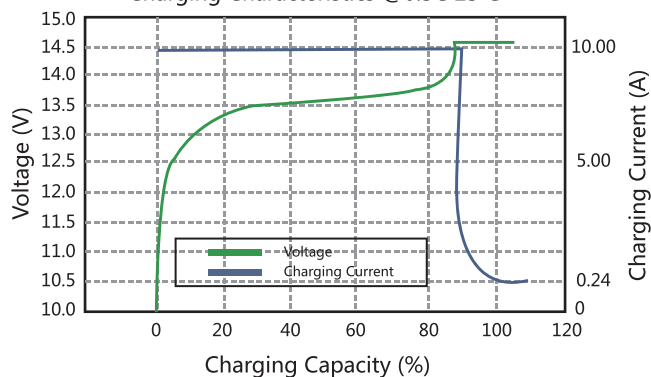

Different DoD Discharge Cycle Life @1C

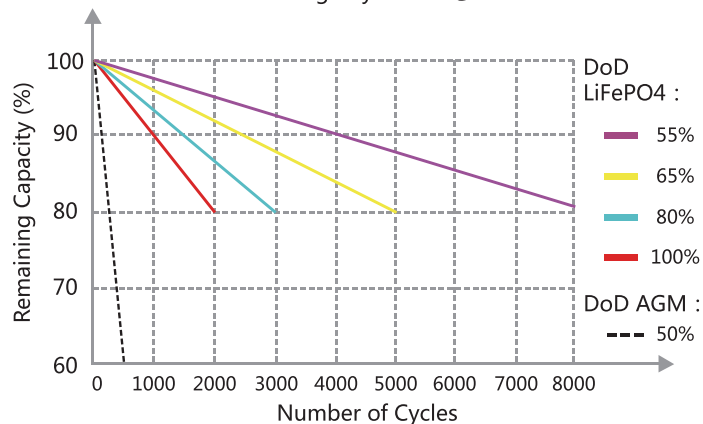

State of Charge Curve @0.5C 25°C

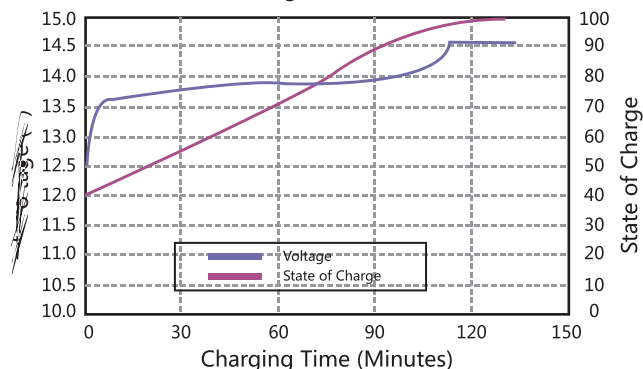

Different Temperature Self Discharge Curve

